

D4200 Full Height Turnstile



SPECIFICATION

POWER SUPPLY

230V, 50Hz

CLEAR WALKWAY

600mm width

CLEAR HEAD HEIGHT

2070mm

DIMENSIONS

1520mm x 1360mm x 2230mm

CONTROL PANEL

PLC

FINISH

Primed/powder coated


CONFIGURATION

120° 3 arm rotor



PLC

Housed in a lockable overhead enclosure, the plc controlled bi-directional mechanism allows one passage per activation, and may be locked or set to free movement in either or both directions.




ACCESS CONTROL

A large mounting pad is fitted to both the entry and exit sides of the frame to allow you to install any type of access controls. These pads feature removable front plates for full cable management.



DESIGN

Canopy segments are fitted over both entry lanes, and can be fitted with LED downlights if required.

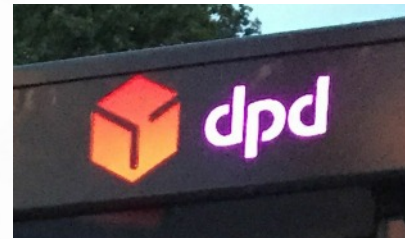

FINISH

D4200 turnstiles are powder coated in any standard RAL colour at no additional charge and you can even specify the rotor in a contrasting colour to the frame. LED backlit logos can be water jet cut to the overhead canopy segments at additional cost.



CONSTRUCTION

The frame and rotor are fully welded heavy duty steel components for maximum strength and longevity, and the rotor pivots on a sealed roller bearing. The 40mm diameter rotor arms are arranged in a 120° design for easy pedestrian access.

